


JIS認証製品
落ちふた式U形側溝 本体

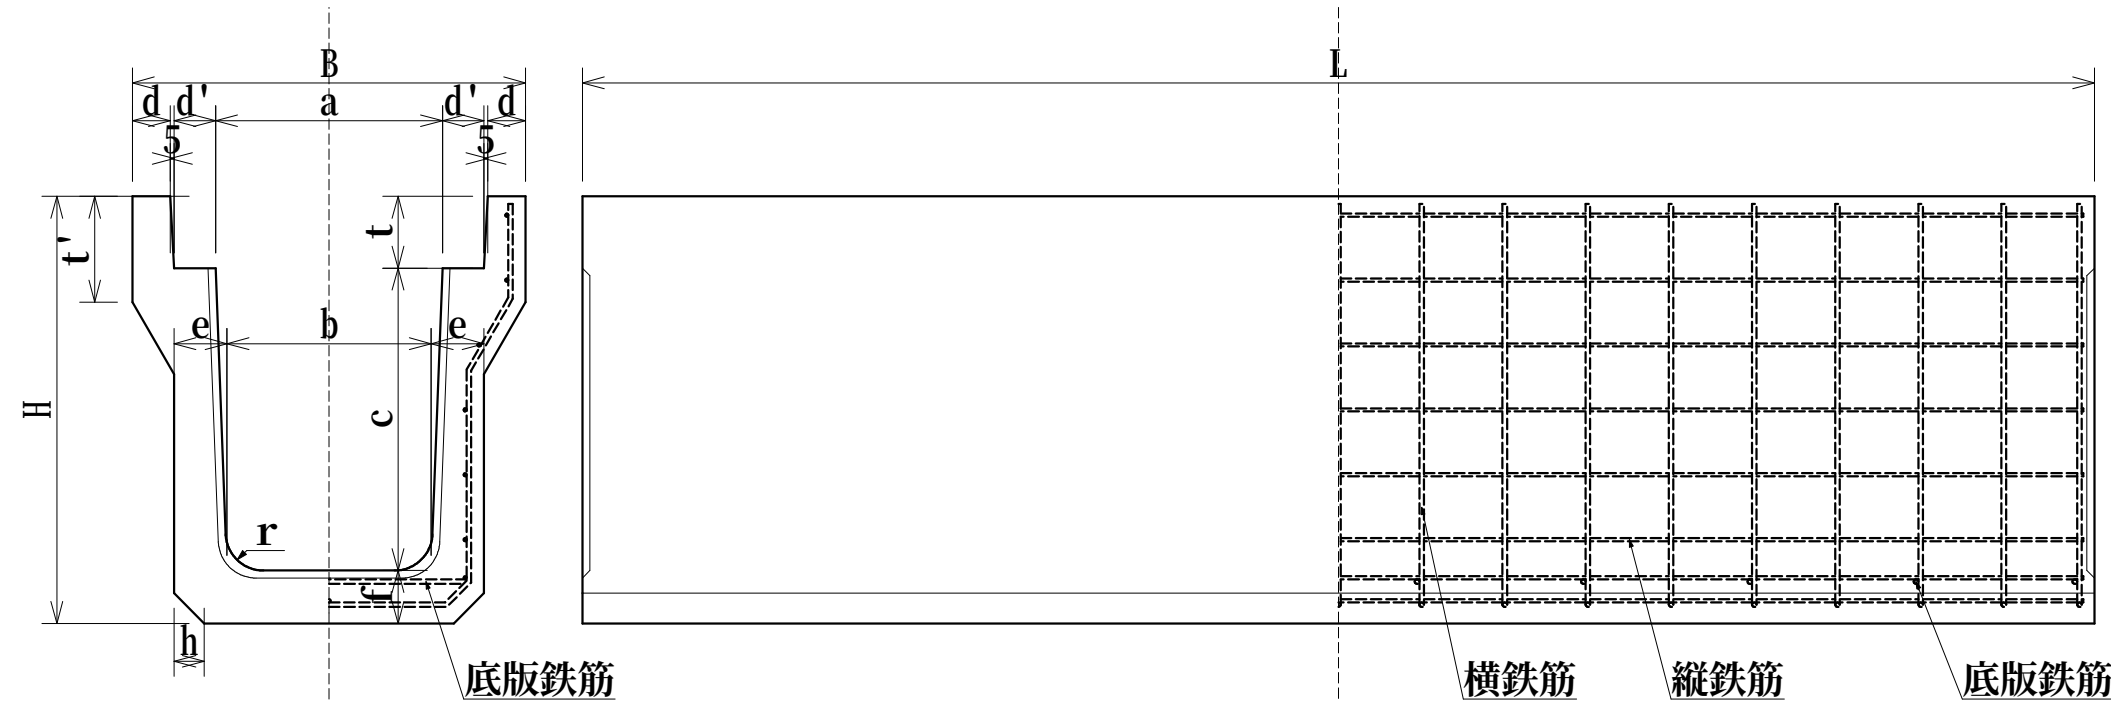

種類	呼び	寸法 (mm)														配筋						参考重量 (kg)
		a	b	c	d	d'	e	f	h	t	t'	r	L	H	B	横鉄筋		縦鉄筋		底版鉄筋		
																径	本数	径	本数	径	本数	
1種	250	250	230	250	40	55	55	55	20	90	120	50	2000	395	450	4.00	10	4.00	11	—	—	290
	300A	300	280	300	40	55	60	60	20	95	120	50	2000	455	500	4.00	10	4.00	11	—	—	348
	300B	300	270	400	40	55	65	65	20	95	120	50	2000	560	500	4.00	10	4.00	13	—	—	420
	300C	300	260	500	40	55	70	70	20	95	120	50	2000	665	500	5.00	10	4.00	15	—	—	497
	400A	400	370	400	40	55	65	65	20	110	135	50	2000	575	600	5.00	10	4.00	14	—	—	457
	400B	400	360	500	40	55	70	70	20	110	135	50	2000	680	600	5.00	10	4.00	16	—	—	537
	500A	500	460	500	45	60	70	70	20	125	150	50	2000	695	720	5.00	10	4.00	17	—	—	594
	500B	500	450	600	45	60	75	75	20	125	150	50	2000	800	720	6.00	10	4.00	21	—	—	680
3種	250	250	230	250	45	55	65	65	30	90	120	50	2000	405	460	5.00	20	4.00	13	5.00	20	333
	300A	300	280	300	50	55	70	70	30	95	140	50	2000	465	520	5.00	24	4.00	13	5.00	24	419
	300B	300	270	400	50	55	70	70	40	95	140	50	2000	565	520	6.00	19	4.00	15	6.00	10	472
	300C	300	260	500	50	55	80	80	40	95	140	50	2000	675	520	6.00	21	4.00	17	6.00	11	585
	400A	400	370	400	55	55	70	70	40	110	140	50	2000	580	630	6.00	23	4.00	17	6.00	12	505
	400B	400	360	500	55	55	80	80	40	110	140	50	2000	690	630	6.00	23	4.00	19	6.00	12	634
	500A	500	460	500	60	60	80	80	40	125	155	50	2000	705	750	6.00	23	4.00	20	6.00	12	685
	500B	500	450	600	60	60	90	90	40	125	175	50	2000	815	750	6.00	25	4.00	24	6.00	13	835

L=1000は、お問い合わせください。