
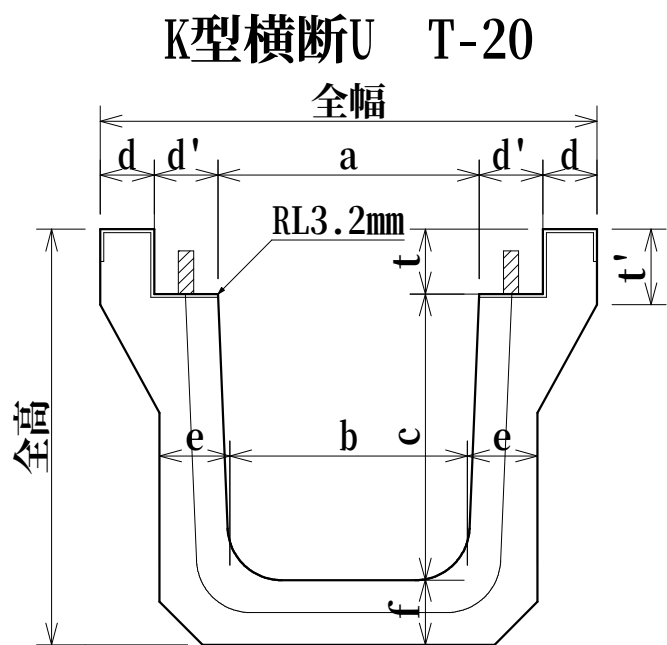
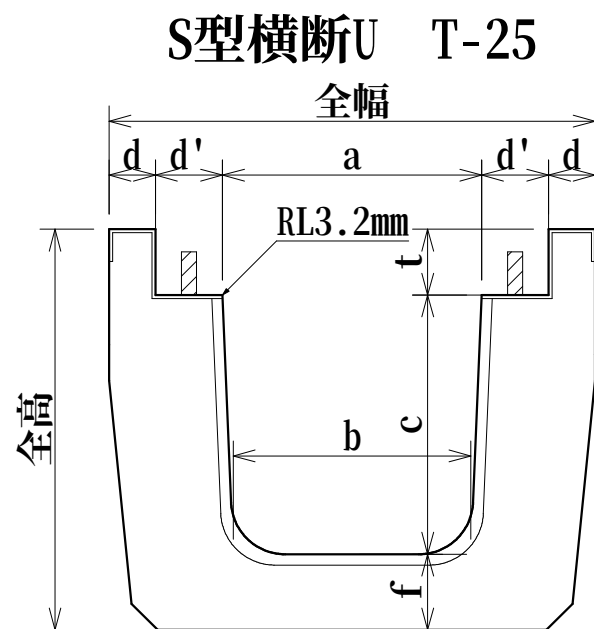
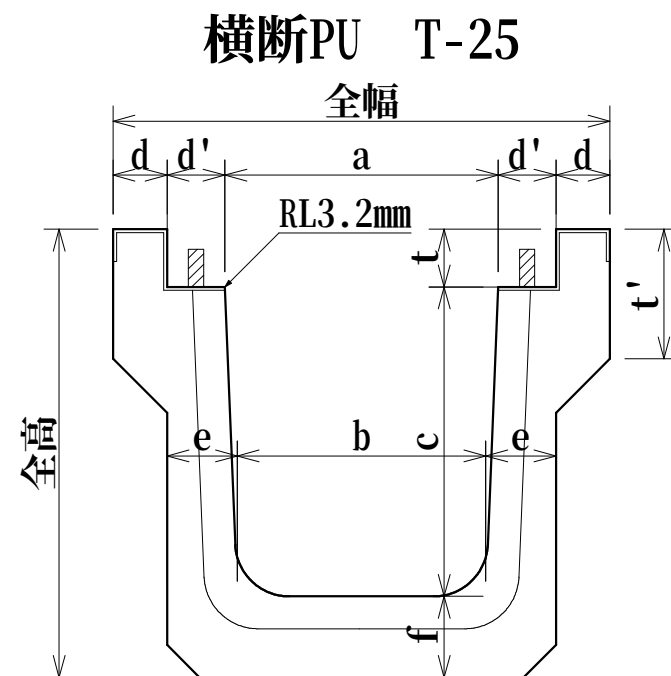


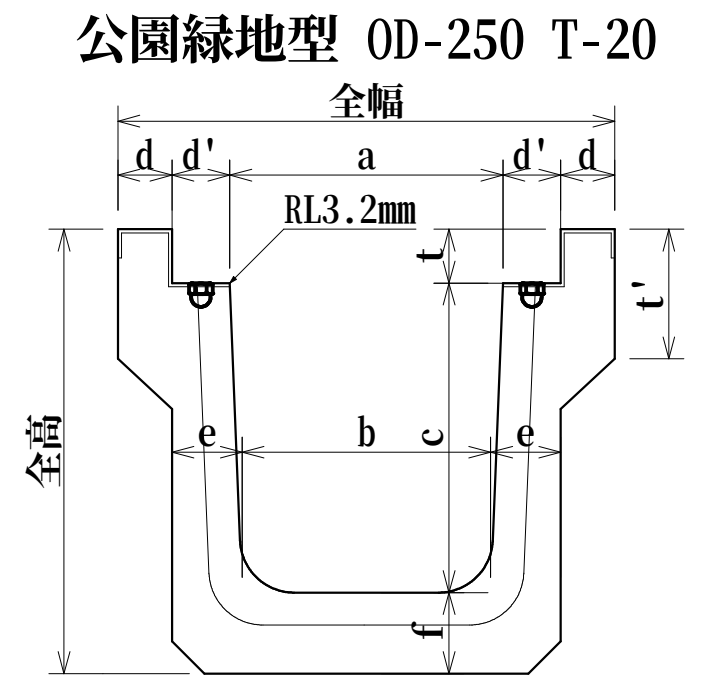

	製品名	全幅	全高	a	b	c	d	d'	e	f	t	t'	L
K型 T-20	横断U240	460	385	242	220	265	50	59	65	60	60	70	1000
	横断U300	520	500	308	260	365	55	51	80	70	65	100	1000
	横断U360	632	520	372	310	365	60	70	105	80	75	100	1000
	横断U450	696	650	454	400	475	68	53	80	100	75	150	1000
S型 T-25	横断U180	380	345	180	170	200	45	55	-	85	60	-	1000
	横断U240	450	371	240	220	240	43	62	-	70	61	-	1000
	横断U300	510	436	300	260	300	48	57	-	70	66	-	1000
横断P U T-25	横断PU250	460	415	253	230	286.5	50	53.5	65	75	53.5	120	1000
	横断PU300A	520	475	302	280	335.5	55	54	70	80	59.5	140	1000
	横断PU300B	520	575	303	270	435.5	55	53.5	70	80	59.5	140	1000
	横断PU300C	520	675	303	260	535.5	55	53.5	80	80	59.5	140	1000
	横断PU400A	630	590	403	370	438.5	60	53.5	70	80	71.5	140	1000
公園緑地型 OD-250 T-20(メス穴)		460	411.5	253	230	286.5	50	53.5	65	75	50	120	1000

※斜切及び端尺物はL=500から製造できます。横断PU250とOD-250は横並びできません。

北村コンクリート工業株式会社